

Greenshine Gel-type Battery

(80Ah – 120Ah – 150Ah – 200Ah)

GEL deep cycle battery with a 12 years floating design life is especially designed for frequent cyclic discharge under extreme temperature.



	GS-GEL-H80	GS-GEL-H120	GS-GEL-H150	GS-GEL-H200
Cells per unit	6			
Voltage per unit	12V			
Capacity	80Ah @ 20hr-rate to 1.75V per cell @ 25°C/ 77°F	120Ah @ 20hr-rate to 1.75V per cell @ 25°C/ 77°F	150Ah @ 20hr-rate to 1.75V per cell @ 25°C/ 77°F	200Ah @ 20hr-rate to 1.75V per cell @ 25°C/ 77°F
Weight	26 kg/ 58 lb.	38 kg/ 84 lb.	46 kg/ 100 lb.	59.2 kg/ 131.5 lb.
Dimensions L x W x H	330×172×214(mm) 13''×7''×8.5''	406×173×233 (mm) 16''×7''×9.2''	483×170×240 (mm) 19''×6.7''×9.5''	522×240×218 (mm) 20.5''×9.44''×8.7''
Max discharge current	800A (5 sec)	1200 (5sec)	1500 (5sec)	1500A (5 sec)
Operating temperature range	-40°C~60°C/ -40°F~140°F			
Float charging voltage	13.6 to 13.8 VDC/ unit average at 25°C/ 77°F			
Recommended maximum charging current	16A	24A	30A	40A
Self-discharge	Valve Regulated Lead Acid can be stored for more than 6 months at 25°C/ 77°F. Self-discharge ratio less than 3% per month at 25°C/ 77°F. Please charge batteries before using			
Equalization and cycle service	14.6 to 14.8 VDC/unit Average at 25°C/ 77°F			
Terminal type	5ft copper wire leads from the battery case			

Battery




+1-949-609-9636


sales@streetlights-solar.com

www.streetlights-solar.com


Life characteristics of cyclic use

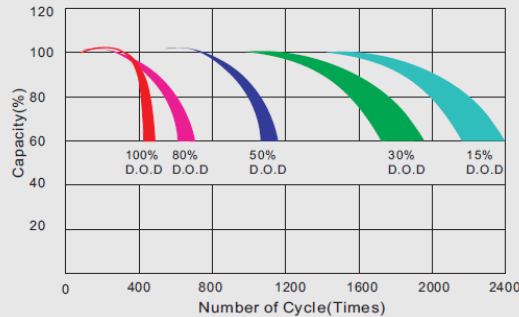


Storage characteristic

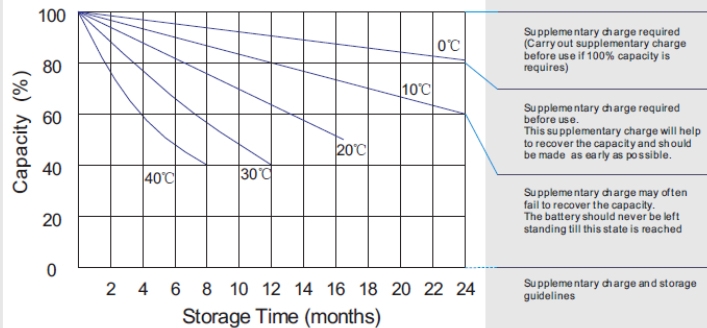

Charge characteristic curve for cyclic use

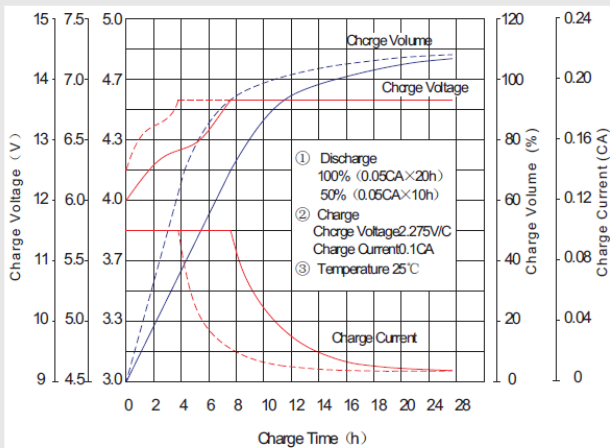

Discharge characteristic curve

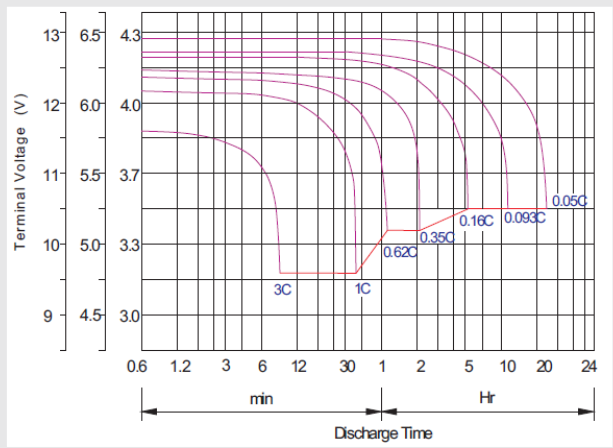

Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
GEL Battery	6V&12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%
	2V	60%	75%	85%	88%	92%	99%	100%	103%	105%	106%
AGM Battery	6V&12V	46%	66%	76%	83%	90%	98%	100%	103%	107%	109%
	2V	55%	70%	80%	85%	92%	99%	100%	104%	108%	110%

Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/cell	1.75V	1.70V	1.60V
Discharge Current (A)	(A) ≤ 0.2C	0.2C < (A) < 1.0C	(A) ≥ 1.0C

Charge the batteries at least once every six months, if they are stored at 25°C.

Charging Method:

Constant Voltage	-0.2Cx2h+2.4-2.45V/Cellx24h, Max. Current 0.3CA
Constant Current	-0.2Cx2h+0.1CAx12h
Fast	-0.2Cx2h+0.3CAx4.0h

Maintenance & Cautions

Cycle service
※ Avoid battery over discharge, especially battery series connection use.
※ Charged with recommend voltage, ensure battery can be full recharged.
In general, recharge capacity should be 1.1-1.15 times discharge capacity.
※ Effect of temperature on cycle charge voltage: -4mV/°C/Cell.
※ There are a number of factors that will affect the length of cyclic service.
The most significant are depth of discharge, ambient temperature, discharge rate, and the manner in which the battery is recharged.
Generally speaking, the most important factors is depth of discharge.